





HDC-3014



HDC-3034



HDC-4019

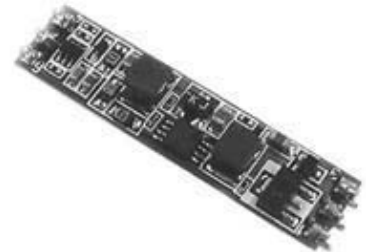

■ Specifications

Type	Voltage Supply V _{cc} (V)	Output Voltage V ₀ (V)TYP.	Output Current I ₀ (mA)Max.	Efficiency (%)	Dimensions(mm)	Note
HDC-5109	3.3	+15.0 +6.5 +5.3 -6.0 -17.0	4 55 70 70 8	70>	-	In-board type Height:2.0mmMax. (not including the board thickness)
HDC-6113	3.3	+16.0 +12.0 +11.5 +6.0 +5.5 -1.0	2.8 30 50 20 50 2	70>	-	In-board type Height:2.0mmMax. (not including the board thickness)
HDC-3114	3.3	+11.5 +9.0 -5.5	8 100 8	80>	-	In-board type Height:1.5mmMax. (not including the board thickness)
HDC-5117	8.5	+15.0 +6.5 +5.3 -6.0 -17.0	4 55 70 70 8	78>	32.0×20.2×5.5	
HDC-3120	12.0	+35.0 +12.2 -5.5	15 500 5	88>	43.0×19.3×8.0	
HDC-4133	12.0	+13.0 +7.5 +5.0 -16.0	26 15 100 7	65>	-	In-board type Height:6.0mmMax. (not including the board thickness)
HDC-3141	3.3	+22.45 -16.55 +8.35	6 6 30	65>	42.0×8.8×5.2	Voltage Control ON/OFF Control
HDC-3014	5.0	+19.0 -3.0 -12.0	2 50 5	70>	37.0×8.0×5.0	
HDC-4019	5.0	+20.0 +6.5 -2.5 -11.0	3 120 120 10	75>	51.7×7.6×4.8	
HDC-3027	5.0	+14.0 +8.0 -5.5	15 150 30	70>	34.7×7.9×5.8	
HDC-4033	5.0	+12.0 +3.3 +21.0 -5.5	280 350 10 15	80>	66.5×8.3×7.8	With output enable terminal
HDC-3034	5.0	+20.0 -3.0 -11.0	4 50 6	65>	35.0×7.9×5.0	
HDC-3054	3.3	+23.5 +9.0 -11.6	3 160 15	75>	-	In-board type Height:2.0mmMax. (not including the board thickness)
HDC-4060	3.3	+15.0 +10.0 +5.0 -2.0	2 140 45 2	80>	-	In-board type Height:2.0mmMax. (not including the board thickness)
HDC-4065	3.3	+15.0 +10.0 +5.0 -2.0	2 90 10 2	70>	-	In-board type Height:1.2mmMax. (not including the board thickness)
HDC-3070	3.3 or 5.0	+13.0 +8.0 -7.0	15 100 60	70>	34.7×7.9×5.8	
HDC-4089	3.3	+15.0 +10.0 +5.0 -2.0	2 110 15 2	80>	-	In-board type Height:1.3mmMax. (not including the board thickness)
HDC-3097	5.0	+30.0 +13.0 -5.5	10 350 20	80>	45.0×13.5×4.3	ON/OFF Control